


D50 Coupler System

DESCRIPTION

The D50 DBR® Coupler is used to join any bar-to-bar connection of the same size, where one bar can be rotated.

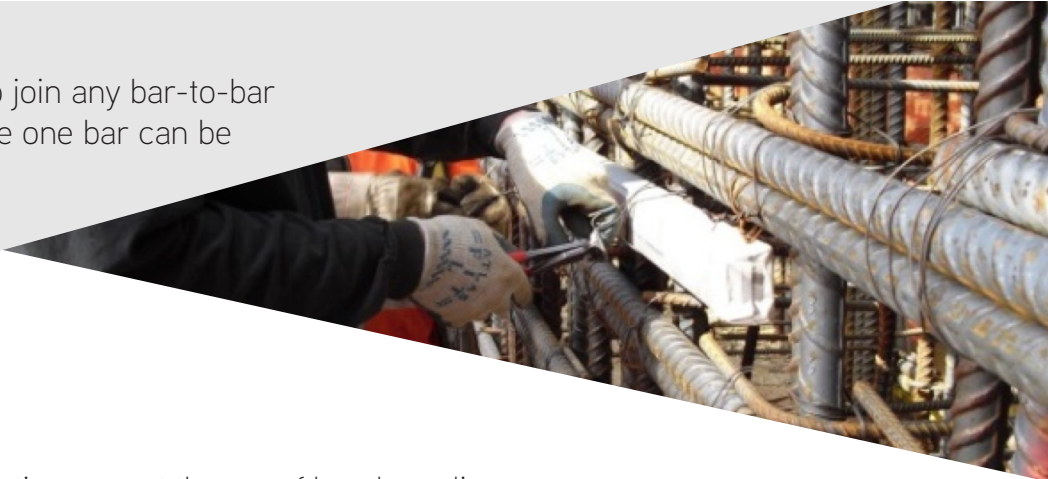

FEATURES & BENEFITS

- Used in areas where rebar congestion prevent the use of long lap splices.
- Available in #4 [13mm] - #11 [36mm]
- Reduces engineering design time
- Eliminates rebar congestion
- Provides Type 1 splicing capacities (125% Fy)
- Available with and without nailing flange



PRODUCT DATA

Thread Data	O.D. x Length
1/2" - 13 UNC	3/4" x 1-7/8"
5/8" - 11 UNC	7/8" x 2"
3/4" - 10 UNC	1-1/6" x 2-3/8"
7/8" - 9 UNC	1-1/4" x 2-3/4"
1" - 8 UNC	1-3/8" x 3-1/8"
1-1/8" - 8 UNC	1-5/8" x 3-5/8"
1-1/4" - 8 UNC	1-3/4" x 4-1/8"
1-3/8" - 8 UNC	1-15/16" x 4-3/8"